NIKO GLASS Left white wall lamp
Ref. 01014a |NAHTRANG

IP20





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	7
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	500
Color temperature (K)	3000K
Power and lm of intensities (w/lm)	1/80-4/250-7/500 W/lm
CRI	>80
Switch type	Touch
Structure material	ALUMINIO + MDF
Diffuser material	Glass
Structure finish	Matt White+Wood
Diffuser finish	Opal
External device load output	CARGA DISPOSITIVOS EXTERNOS POR INDUCCION + USB A

Installation instructions

Energy label

Photometric



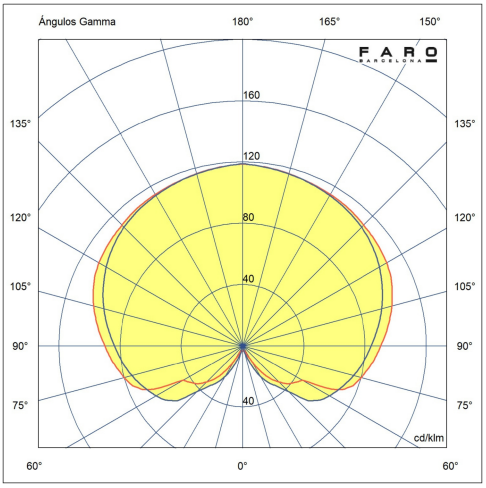

NIKO PC Left white wall lamp
Ref. 01026a |NAHTRANG

IP20





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	7
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	500
Color temperature (K)	3000K
Power and lm of intensities (w/lm)	1/80-4/250-7/500 W/lm
CRI	>80
Switch type	Touch
Structure material	ALUMINIO + MDF
Diffuser material	PC
Structure finish	Matt White+Wood
Diffuser finish	Opal
External device load output	CARGA DISPOSITIVOS EXTERNOS POR INDUCCION + USB A

Installation instructions

Energy label

Photometric



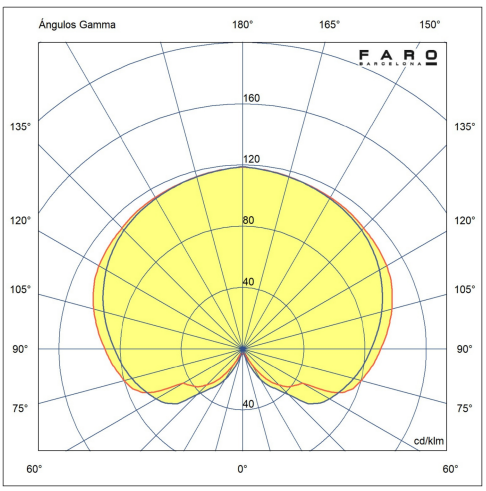

NIKO PC Right white wall lamp
Ref. 01027a |NAHTRANG

IP20





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	7
Energy class light source	F
Light source	SMD LED
Luminous Flux (lm)	500
Color temperature (K)	3000K
Power and lm of intensities (w/lm)	1/80-4/250-7/500 W/lm
CRI	>80
Switch type	Touch
Structure material	ALUMINIO + MDF
Diffuser material	PC
Structure finish	Matt White+Wood
Diffuser finish	Opal
External device load output	CARGA DISPOSITIVOS EXTERNOS POR INDUCCION + USB A

Installation instructions

Energy label

Photometric



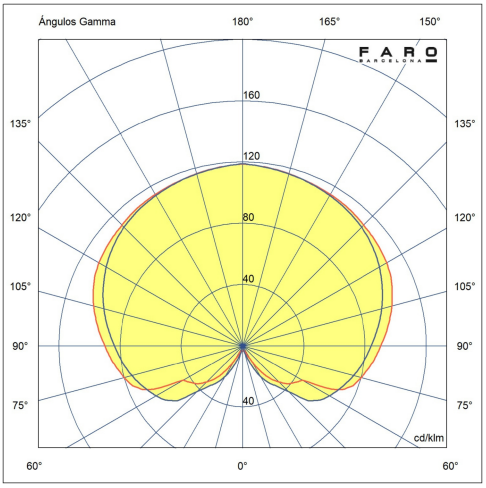

NIKO PC Right white wall lamp
Ref. 01027a |NAHTRANG



Document generated on 09/10/2026