NILO 600 Black wall lamp 12W
Ref. 63316

IP44





Mounting	Wall, Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	12
Energy class light source	E
Light source	SMD LED
Lifespan	30.000h L70 B50
Power factor	0.84
Luminous Flux (lm)	845
Color temperature (K)	3000K
Opening angle degrees	160
Light orientation	Direct
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	450 mA
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Matt Black
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



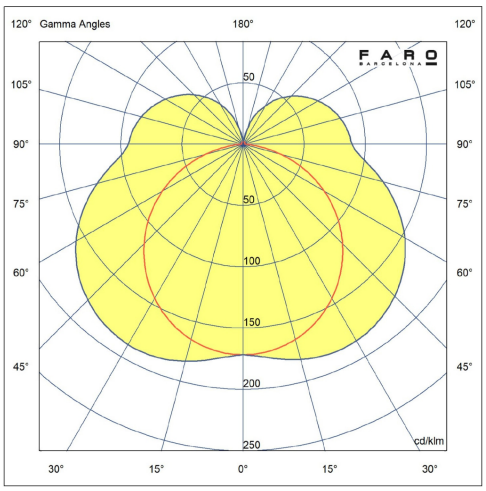

NILO 900 Black wall lamp 18W
Ref. 63317

IP44





Mounting	Wall, Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	18
Energy class light source	D
Light source	SMD LED
Lifespan	30.000h L70 B50
Power factor	0.84
Luminous Flux (lm)	1351
Color temperature (K)	3000K
Opening angle degrees	160
Light orientation	Direct
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	450 mA
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Matt Black
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



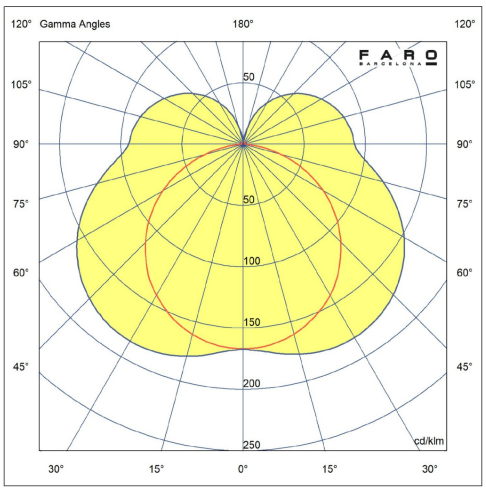

FARO
BARCELONA

NILO 900 Black wall lamp 18W
Ref. 63317



Document generated on 15/10/2026

NILO 600 Chrome wall lamp 12W
Ref. 63318

IP44





Mounting	Wall, Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	12
Energy class light source	E
Light source	SMD LED
Lifespan	30.000h L70 B50
Power factor	0.84
Luminous Flux (lm)	845
Color temperature (K)	3000K
Opening angle degrees	160
Light orientation	Direct
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	450 mA
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Chrome-Plated
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



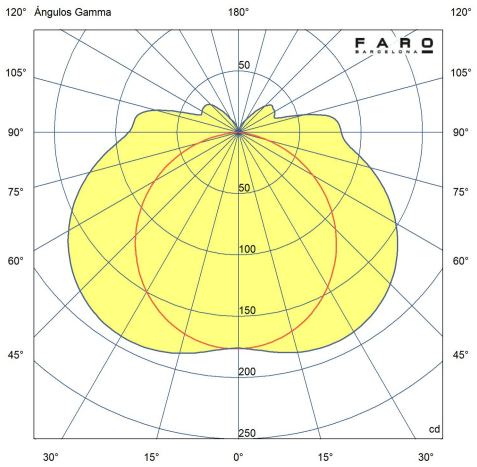

NILO 900 Chrome wall lamp 18W
Ref. 63319

IP44





Mounting	Wall, Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	44
Power (W)	18
Energy class light source	D
Light source	SMD LED
Lifespan	30.000h L70 B50
Power factor	0.84
Luminous Flux (lm)	1351
Color temperature (K)	3000K
Opening angle degrees	160
Light orientation	Direct
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	450 mA
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Chrome-Plated
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



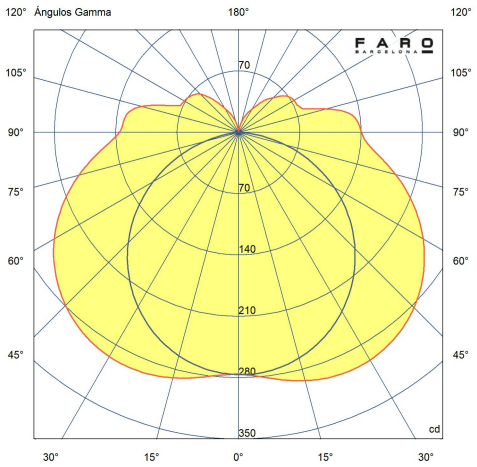

FARO
BARCELONA

NILO 900 Chrome wall lamp 18W
Ref. 63319

