

NINA Black pendant lamp
Ref. 22023

IP20





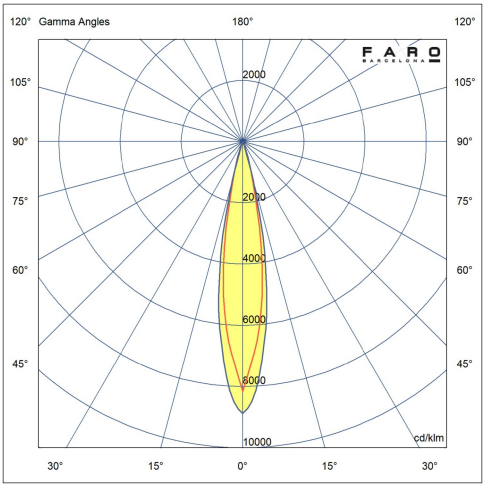

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	4
Energy class light source	G
Light source	SMD LED
Power factor	0.53
Luminous Flux (lm)	108
Color temperature (K)	2700K
Opening angle degrees	38
Light orientation	Direct
Photobiological risk	2
CRI	90
Control System	On/off
Supply current	500 mA
Cable length	1500 mm
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Matt Black
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

NINA Black pendant lamp
Ref. 22023




Document generated on 07/10/2026

NINA White pendant lamp
Ref. 22024

IP20



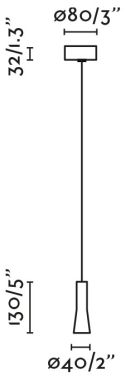


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	4
Energy class light source	G
Light source	SMD LED
Power factor	0.53
Luminous Flux (lm)	108
Color temperature (K)	2700K
Opening angle degrees	38
Light orientation	Direct
Photobiological risk	2
CRI	90
Control System	On/off
Supply current	500 mA
Cable length	1500 mm
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Matt White
Diffuser finish	Transparent

Installation instructions

Energy label


Photometric

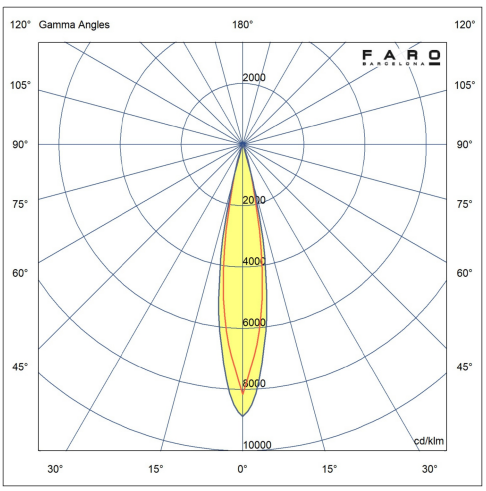


NINA Gold pendant lamp
Ref. 22025

IP20



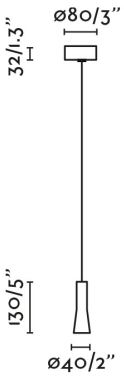

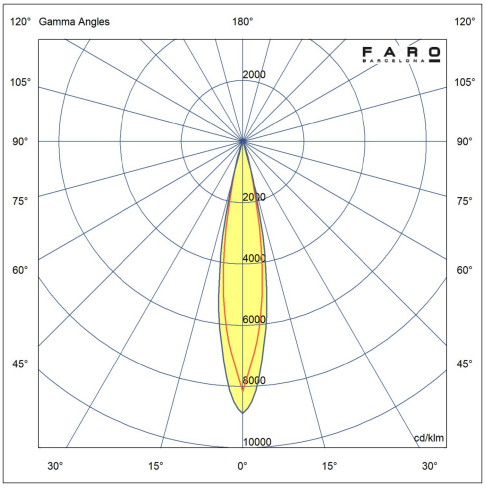

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	4
Energy class light source	G
Light source	SMD LED
Power factor	0.53
Luminous Flux (lm)	108
Color temperature (K)	2700K
Opening angle degrees	38
Light orientation	Direct
Photobiological risk	2
CRI	90
Control System	On/off
Supply current	500 mA
Cable length	1500 mm
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Satin Gold
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric