
# PIXIE White wall lamp with reading light
Ref. 24015 |NAHTRANG

IP20







| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 20 |
| Power (W) | 4 |
| Energy class light source | G |
| Light source | HIGH POWER LED |
| Power factor | 0.44 |
| Luminous Flux (lm) | 107 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 45 |
| Light orientation | Direct |
| Rotation angles 2 | 360 |
| Photobiological risk | 2 |
| Reading light beam angle | 30 |
| CRI | >80 |
| Control System | On/off |
| Supply current | 700 mA |
| Switch type | Touch |
| Structure material | Aluminium + Aluminium |
| Diffuser material | Glass |
| Structure finish | Matt White+Matt White |
| RAL/Pantone structure | RAL 9010 |
| RAL/Pantone shade | RAL 9010 |
| Diffuser finish | Transparent |

Installation instructions

Energy label

Photometric

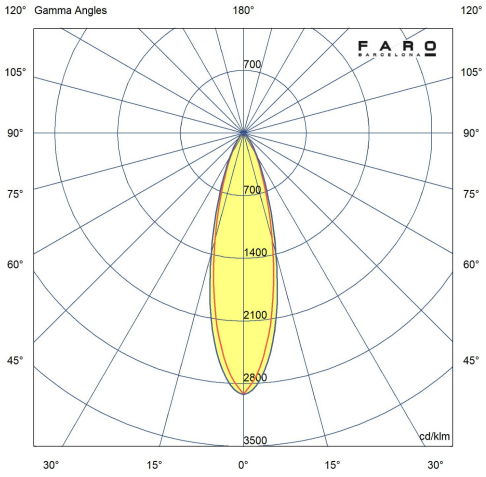


**PIXIE White wall lamp with reading light**
Ref. 24015 |NAHTRANG



# PIXIE Black wall lamp with reading light
Ref. 24016 |NAHTRANG

IP20







| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 100V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 20 |
| Power (W) | 4 |
| Energy class light source | G |
| Light source | HIGH POWER LED |
| Power factor | 0.44 |
| Luminous Flux (lm) | 107 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 45 |
| Light orientation | Direct |
| Rotation angles 2 | 360 |
| Photobiological risk | 2 |
| Reading light beam angle | 30 |
| CRI | >80 |
| Control System | On/off |
| Supply current | 700 mA |
| Switch type | Touch |
| Structure material | Aluminium + Aluminium |
| Diffuser material | Glass |
| Structure finish | Matt Black+Matt Black |
| RAL/Pantone structure | RAL 9011 |
| RAL/Pantone shade | RAL 9011 |
| Diffuser finish | Transparent |

Installation instructions

Energy label

Photometric

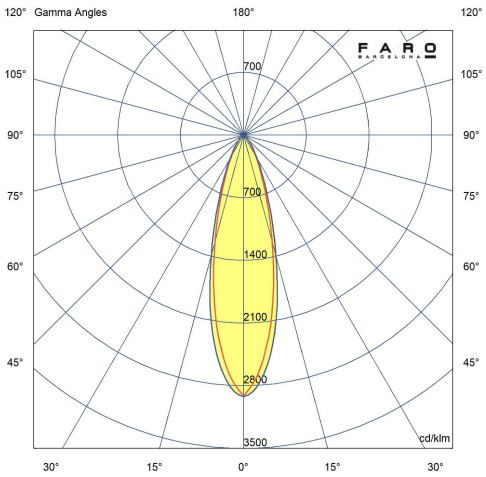

**PIXIE Black wall lamp with reading light**
Ref. 24016 |NAHTRANG

