
ROB Bronze wall lamp with reading light
Ref. 68497

IP20






Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	F
Light source	HIGH POWER LED
Power factor	0.43
Luminous Flux (lm)	230
Color temperature (K)	3000K
Opening angle degrees	36
Light orientation	Direct
Tilt angles	90
Rotation angles 2	355
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	500 mA
Switch type	On/Off
Structure material	Steel
Diffuser material	Glass
Structure finish	Bronze
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

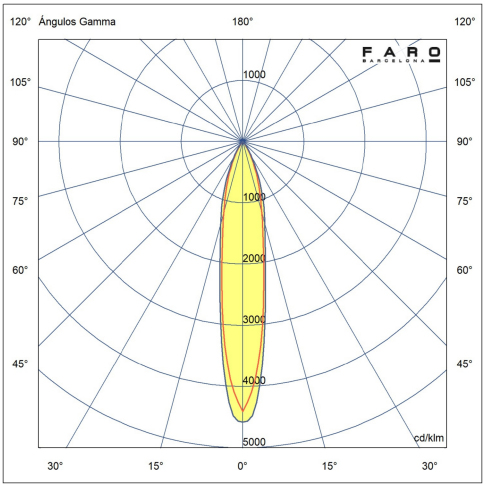

ROB Bronze wall lamp with reading light
Ref. 68497

Recommended bulbs



Bulb A60 MAT LED E27 8W 2700K

Reference	17463
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	8
Luminous Flux (lm)	800
Color temperature (K)	2700K
Opening angle degrees	360




Bulb A60 E27 7W 2700K TUYA WIFI

Reference	17498
Voltage (V)	220V-240V
Hertz	50/60Hz
Power (W)	7
Luminous Flux (lm)	806
Color temperature (K)	2700K
Opening angle degrees	360

ROB Matt nickel wall lamp with reading light
Ref. 68499

IP20






Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	F
Light source	HIGH POWER LED
Power factor	0.43
Luminous Flux (lm)	233
Color temperature (K)	3000K
Opening angle degrees	36
Light orientation	Direct
Tilt angles	90
Rotation angles 2	355
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	500 mA
Switch type	On/Off
Structure material	Steel
Diffuser material	Glass
Structure finish	Satin Nickel
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

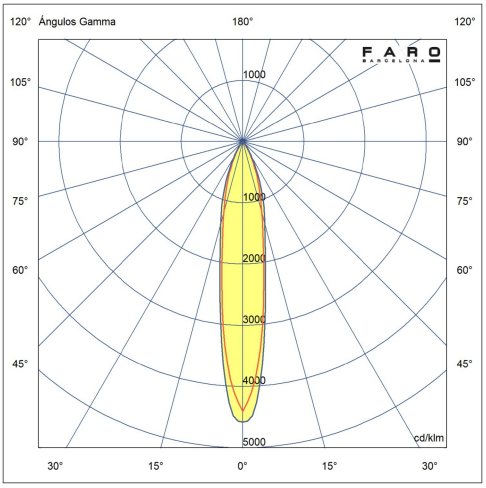

FARO
BARCELONA

ROB Matt nickel wall lamp with reading light


Ref. 68499



ROB White wall lamp reader
Ref. 68508

IP20






Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	F
Light source	HIGH POWER LED
Power factor	0.43
Luminous Flux (lm)	233
Color temperature (K)	3000K
Opening angle degrees	36
Light orientation	Direct
Tilt angles	90
Rotation angles 2	355
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	500 mA
Switch type	On/Off
Structure material	Steel
Diffuser material	Glass
Structure finish	Matt White
RAL/Pantone structure	RAL 9010
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

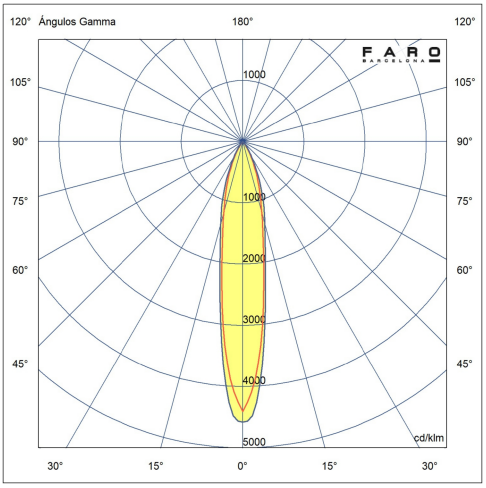

ROB Black wall lamp reader
Ref. 68509

IP20



Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	3
Energy class light source	F
Light source	HIGH POWER LED
Power factor	0.43
Luminous Flux (lm)	233
Color temperature (K)	3000K
Opening angle degrees	36
Light orientation	Direct
Tilt angles	90
Rotation angles 2	355
Photobiological risk	2
CRI	>80
Control System	On/off
Supply current	500 mA
Switch type	On/Off
Structure material	Steel
Diffuser material	Glass
Structure finish	Matt Black
RAL/Pantone structure	RAL 9011
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

