ROL White ceiling lamp 9W
Ref. 68619

IP20





Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	9
Energy class light source	E
Light source	COB LED
Lifespan	50.000h L80 B10
Power factor	0.6
Luminous Flux (lm)	526
Color temperature (K)	2700K
Opening angle degrees	40
Light orientation	Direct
Photobiological risk	0
UGR	16
CRI	≥90
Control System	On/off
Supply current	200 mA
Structure material	Aluminium + ABS
Diffuser material	PMMA
Structure finish	Matt White
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric



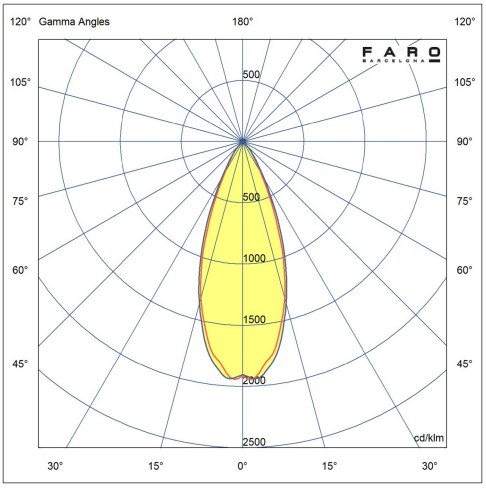

FARO
BARCELONA

ROL White ceiling lamp 9W
Ref. 68619



ROL Black ceiling lamp 9W
Ref. 68620

IP20





Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	9
Energy class light source	E
Light source	COB LED
Lifespan	50.000h L80 B10
Power factor	0.6
Luminous Flux (lm)	526
Color temperature (K)	2700K
Opening angle degrees	40
Light orientation	Direct
Photobiological risk	0
UGR	16
CRI	≥90
Control System	On/off
Supply current	200 mA
Structure material	Aluminium + ABS
Diffuser material	PMMA
Structure finish	Matt Black
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric



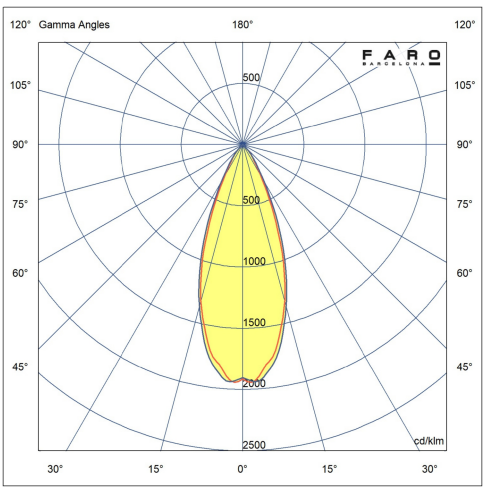

ROL White ceiling lamp 15W
Ref. 68621

IP20





Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Energy class light source	E
Light source	COB LED
Lifespan	50.000h L80 B10
Power factor	0.6
Luminous Flux (lm)	948
Color temperature (K)	2700K
Opening angle degrees	40
Light orientation	Direct
Photobiological risk	0
UGR	19
CRI	≥90
Control System	On/off
Supply current	350 mA
Structure material	Aluminium + ABS
Diffuser material	PMMA
Structure finish	Matt White
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric



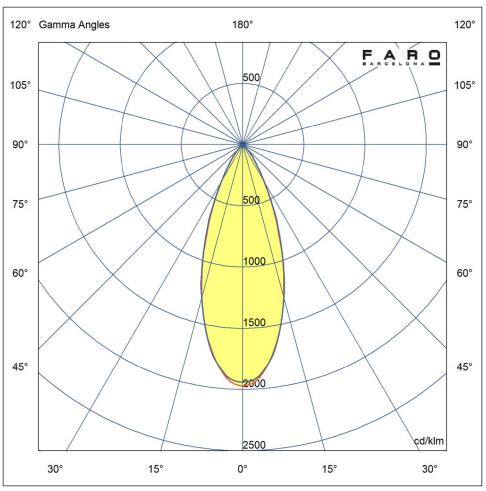

ROL Black ceiling lamp 15W
Ref. 68622

IP20





Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	15
Energy class light source	E
Light source	COB LED
Lifespan	50.000h L80 B10
Power factor	0.6
Luminous Flux (lm)	948
Color temperature (K)	2700K
Opening angle degrees	40
Light orientation	Direct
Photobiological risk	0
UGR	19
CRI	≥90
Control System	On/off
Supply current	350 mA
Structure material	Aluminium + ABS
Diffuser material	PMMA
Structure finish	Matt Black
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric



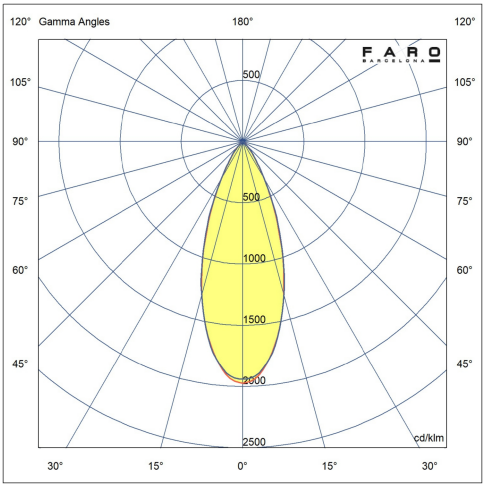

ROL White ceiling lamp 30W
Ref. 68623

IP20





Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	30
Energy class light source	F
Light source	COB LED
Lifespan	50.000h L80 B10
Power factor	0.97
Luminous Flux (lm)	1966
Color temperature (K)	2700K
Opening angle degrees	60
Light orientation	Direct
Photobiological risk	0
UGR	19
CRI	≥90
Control System	On/off
Supply current	700 mA
Structure material	Aluminium + ABS
Diffuser material	PMMA
Structure finish	Matt White
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric



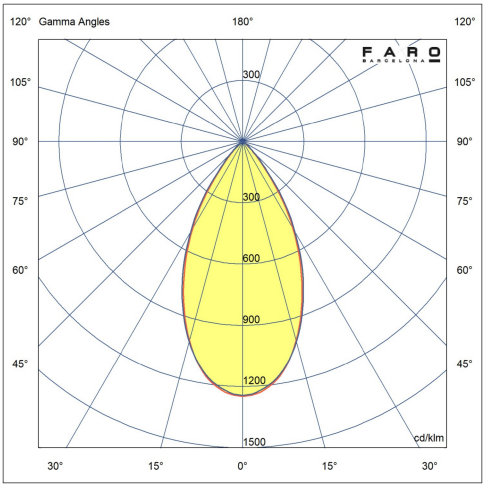

ROL Black ceiling lamp 30W
Ref. 68624

IP20



Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	30
Energy class light source	F
Light source	COB LED
Lifespan	50.000h L80 B10
Power factor	0.97
Luminous Flux (lm)	1966
Color temperature (K)	2700K
Opening angle degrees	60
Light orientation	Direct
Photobiological risk	0
UGR	19
CRI	≥90
Control System	On/off
Supply current	700 mA
Structure material	Aluminium + ABS
Diffuser material	PMMA
Structure finish	Matt Black
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric

