SUAU Bronze recessed reading lamp
Ref. 62111 |NAHTRANG

IP20





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	4,5
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	193
Color temperature (K)	3000K
Opening angle degrees	30
Tilt angles	90
Rotation angles 2	355
CRI	>80
Switch type	On/Off
Structure material	Aluminium + Steel
Structure finish	Bronze
Cut-out Size for Recessed Mount	80x155

Installation instructions

Energy label

Photometric

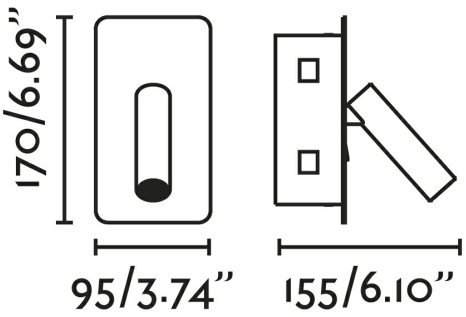

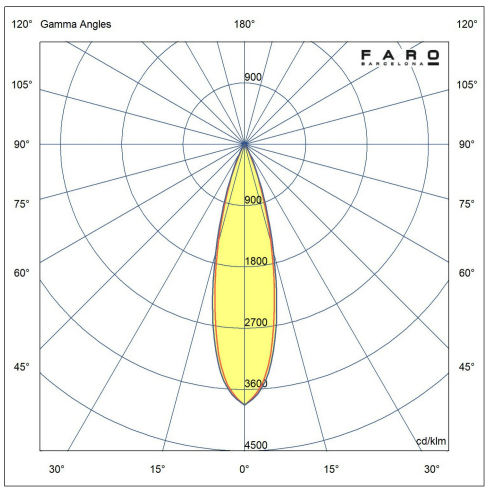

SUAU Satin gold recessed reading lamp
Ref. 62114 |NAHTRANG

IP20





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	4,5
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	193
Color temperature (K)	3000K
Opening angle degrees	30
Tilt angles	90
Rotation angles 2	355
CRI	>80
Switch type	On/Off
Structure material	Aluminium + Steel
Structure finish	Satin Gold
Cut-out Size for Recessed Mount	80x155

Installation instructions

Energy label

Photometric



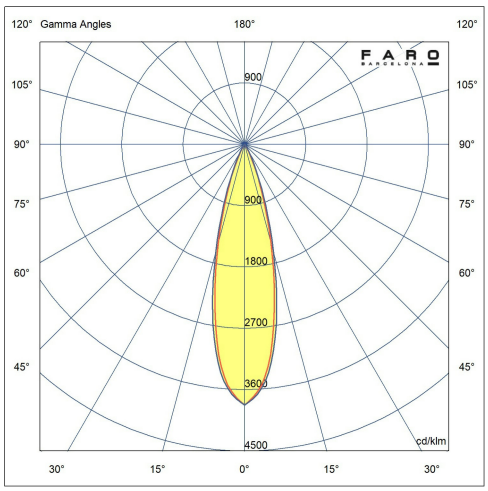

SUAU Matt nickel recessed lamp
Ref. 62126 |NAHTRANG

IP20





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	4,5
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	193
Color temperature (K)	3000K
Opening angle degrees	30
Tilt angles	90
Rotation angles 2	355
CRI	>80
Switch type	On/Off
Structure material	Aluminium + Steel
Structure finish	Satin Nickel
Cut-out Size for Recessed Mount	80x155

Installation instructions

Energy label

Photometric



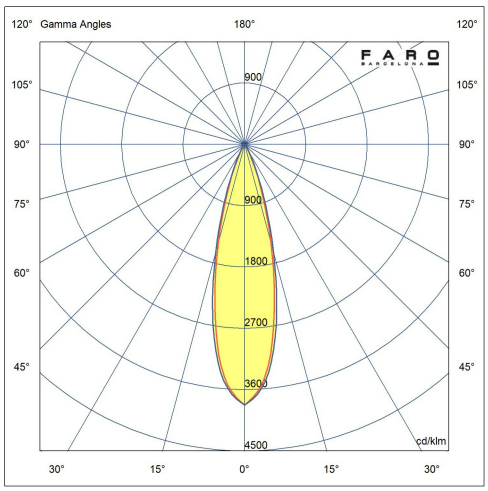

SUAU Black reader recessed lamp
Ref. 62128 |NAHTRANG

IP20





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	4,5
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	193
Color temperature (K)	3000K
Opening angle degrees	30
Tilt angles	90
Rotation angles 2	355
Reading light lumens (lm)	140
CRI	>80
Switch type	On/Off
Structure material	Aluminium + Steel
Structure finish	Matt Black
Cut-out Size for Recessed Mount	80x155

Installation instructions

Energy label

Photometric



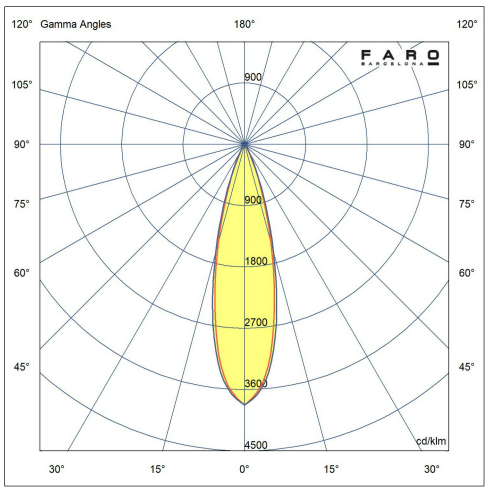

SUAU White reader recessed lamp
Ref. 62129 |NAHTRANG

IP20



Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	4,5
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	193
Color temperature (K)	3000K
Opening angle degrees	30
Tilt angles	90
Rotation angles 2	355
CRI	>80
Switch type	On/Off
Structure material	Aluminium + Steel
Structure finish	Matt White
Cut-out Size for Recessed Mount	80x155

Installation instructions

Energy label

Photometric

