SUAU USB A White wall lamp with right reader

Ref. 62122 |NAHTRANG




IP20


Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	3
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	190
Color temperature (K)	3000K
Opening angle degrees	30
Tilt angles	90
Rotation angles 2	355
CRI	>80
Switch type	On/Off
Structure material	Aluminium + Steel
Structure finish	Matt White
External device load output	SALIDA USB TIPO A

Installation instructions

Energy label

Photometric



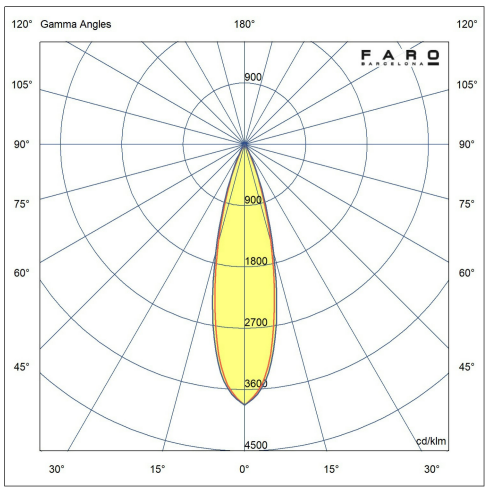

SUAU USB A Grey wall lamp with right reader

Ref. 62123 |NAHTRANG



IP20

Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	3
Energy class light source	F
Light source	HIGH POWER LED
Luminous Flux (lm)	190
Color temperature (K)	3000K
Opening angle degrees	30
Tilt angles	90
Rotation angles 2	355
CRI	>80
Switch type	On/Off
Structure material	Aluminium + Steel
Structure finish	Matt Silver
External device load output	SALIDA USB TIPO A

Installation instructions

Energy label

Photometric

