# TIMIT USB C White wall lamp reader
Ref. 62760 |FARO LAB

IP20





| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 20 |
| Power (W) | 4 |
| Energy class light source | F |
| Light source | HIGH POWER LED |
| Luminous Flux (lm) | 357 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 34 |
| Tilt angles | 90 |
| Rotation angles 2 | 355 |
| CRI | 90 |
| Supply current | 350 mA |
| Switch type | On/Off |
| Structure material | Steel + Aluminium |
| Structure finish | Matt White+Textured Black |
| External device load output | SALIDA USB TIPO C |

Installation instructions

Energy label

Photometric



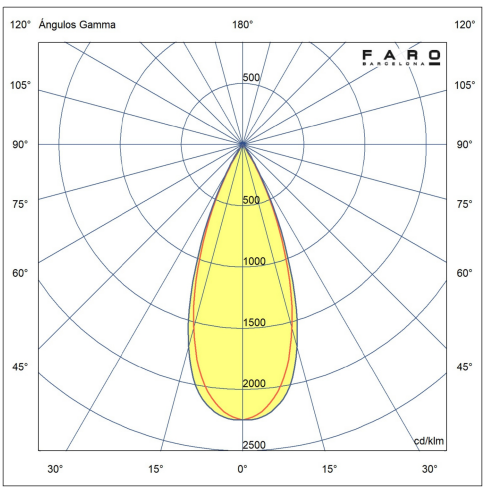**TIMIT USB C White wall lamp reader**
Ref. 62760 |FARO LAB



# TIMIT USB C Black wall lamp reader

Ref. 62761 |FARO LAB

IP20





| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 20 |
| Power (W) | 4 |
| Energy class light source | F |
| Light source | HIGH POWER LED |
| Luminous Flux (lm) | 357 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 34 |
| Tilt angles | 90 |
| Rotation angles 2 | 355 |
| CRI | 90 |
| Supply current | 350 mA |
| Switch type | On/Off |
| Structure material | Steel + Aluminium |
| Structure finish | Matt Black+Textured Black |
| External device load output | SALIDA USB TIPO C |

Installation instructions

Energy label

Photometric


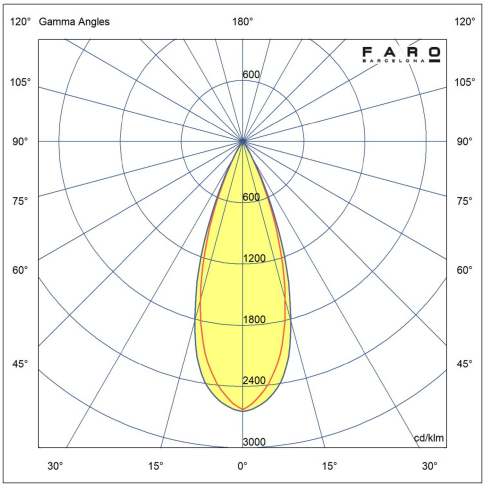
# TIMIT White wall lamp reader
Ref. 62762 |FARO LAB

IP20





| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 20 |
| Power (W) | 4 |
| Energy class light source | F |
| Light source | HIGH POWER LED |
| Luminous Flux (lm) | 357 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 34 |
| Tilt angles | 90 |
| Rotation angles 2 | 355 |
| CRI | 90 |
| Supply current | 350 mA |
| Switch type | On/Off |
| Structure material | Steel + Aluminium |
| Structure finish | Matt White+Textured Black |

Installation instructions


Energy label

Photometric



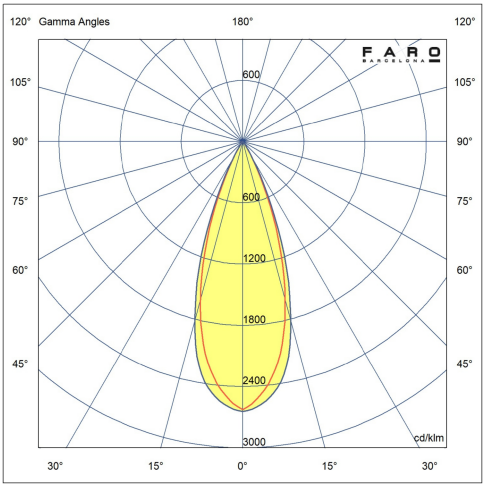**TIMIT White wall lamp reader**
Ref. 62762 |FARO LAB

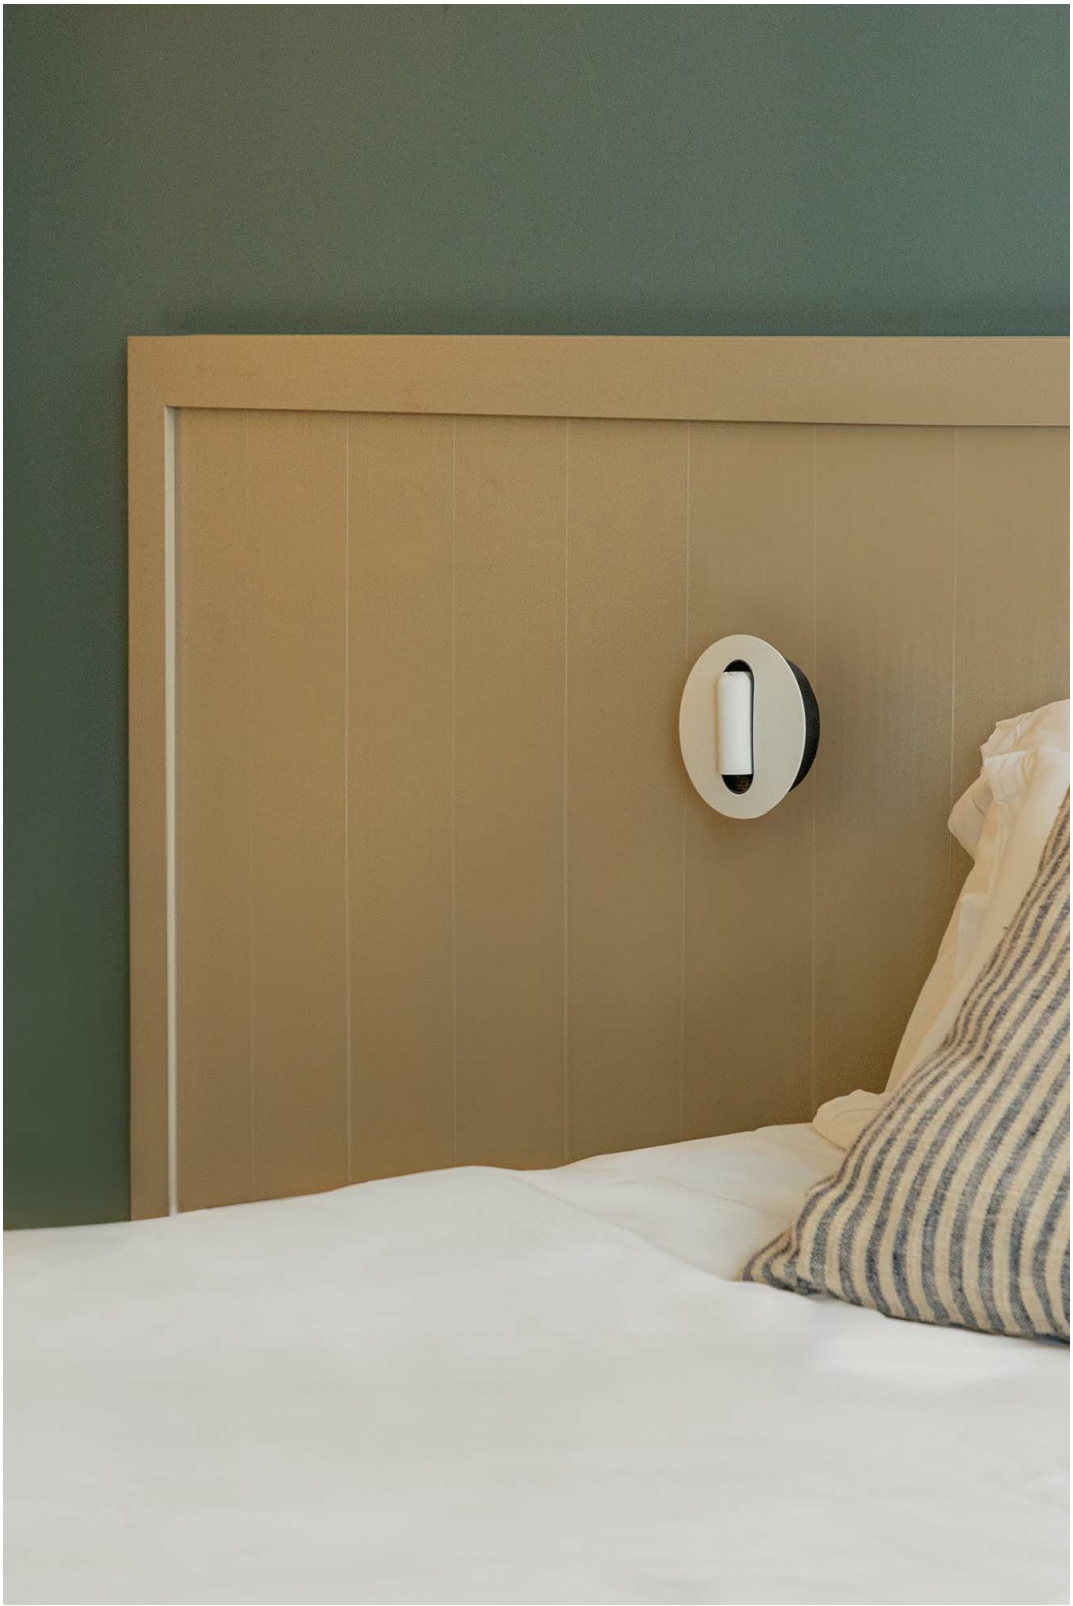

Document generated on 01/10/2026

# TIMIT Black wall lamp reader
Ref. 62763 |FARO LAB

IP20



| | |
|---|---|
| Mounting | Wall |
| Voltage (V) | 220V-240V |
| Hertz | 50/60Hz |
| Class | II |
| IP | 20 |
| Power (W) | 4 |
| Energy class light source | F |
| Light source | HIGH POWER LED |
| Luminous Flux (lm) | 357 |
| Color temperature (K) | 2700K |
| Opening angle degrees | 34 |
| Tilt angles | 90 |
| Rotation angles 2 | 355 |
| CRI | 90 |
| Supply current | 350 mA |
| Switch type | On/Off |
| Structure material | Steel + Aluminium |
| Structure finish | Matt Black+Textured Black |

Installation instructions

Energy label

Photometric

