TAK SURFACE white prism surface 20W 2700K CRI90 ON/OFF

Ref. 043092711 |FARO LAB


IP20




Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	20
Energy class light source	D
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.92
Luminous Flux (lm)	1940
Color temperature (K)	2700K
Opening angle degrees	90
Light orientation	Direct
Photobiological risk	0
UGR	19
CRI	90
Control System	On/off
Supply current	500 mA
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	White
RAL/Pantone structure	RAL 9016
Diffuser finish	Prismatic

Energy label

Photometric



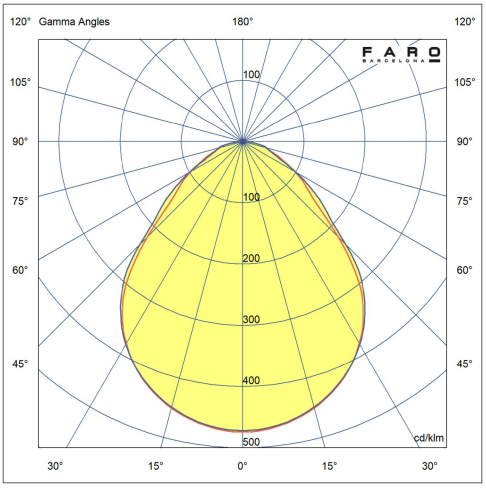

TAK SURFACE white prism surface 20W 2700K CRI90 ON/OFF

Ref. 043092711 |FARO LAB



TAK SURFACE black prism surface 20W 2700K CRI90 ON/OFF

Ref. 043092712 |FARO LAB

IP20



Mounting	Ceiling
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	20
Power (W)	20
Energy class light source	D
Light source	SMD LED
Lifespan	50.000h L70 B10
Power factor	0.92
Luminous Flux (lm)	1940
Color temperature (K)	2700K
Opening angle degrees	90
Light orientation	Direct
Photobiological risk	0
UGR	19
CRI	90
Control System	On/off
Supply current	500 mA
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Black
RAL/Pantone structure	RAL 9005
Diffuser finish	Prismatic

Energy label

Photometric

