TAKUA Dark grey wall lamp
Ref. 71277

IP65





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	65
Power (W)	10
Energy class light source	F
Light source	SMD LED
Lifespan	30.000h L70 B50
Power factor	0.96
Luminous Flux (lm)	522
Color temperature (K)	3000K
Opening angle degrees	136
Light orientation	Indirect lighting
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	350 mA
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Dark grey
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



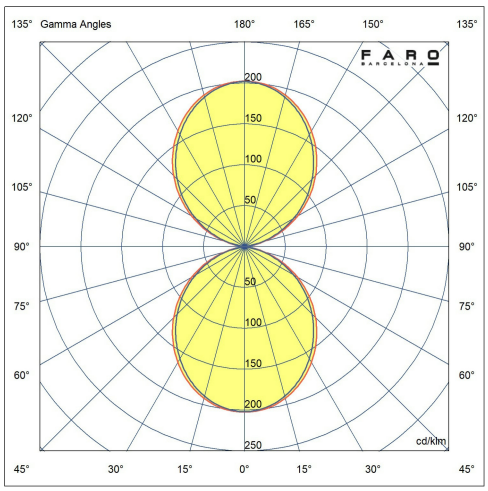

TAKUA White wall lamp
Ref. 71308

IP65





Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	65
Power (W)	10
Energy class light source	F
Light source	SMD LED
Lifespan	30.000h L70 B50
Power factor	0.96
Luminous Flux (lm)	522
Color temperature (K)	3000K
Opening angle degrees	136
Light orientation	Indirect lighting
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	350 mA
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Matt white
Diffuser finish	Opal

Installation instructions

Energy label

Photometric



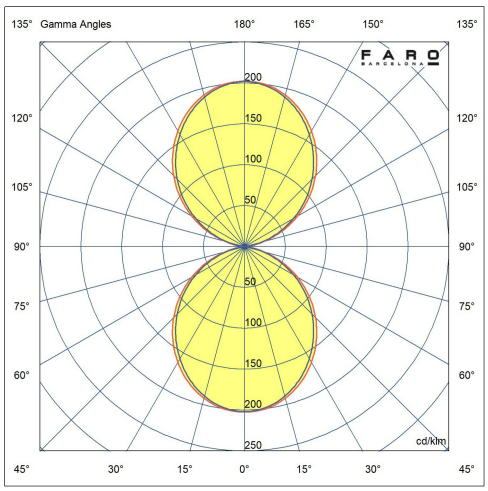

FARO
BARCELONA

TAKUA White wall lamp
Ref. 71308



Document generated on 06/11/2026

TAKUA Rust wall lamp
Ref. 71309



Mounting	Wall
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	65
Power (W)	10
Energy class light source	F
Light source	SMD LED
Lifespan	30.000h L70 B50
Power factor	0.96
Luminous Flux (lm)	522
Color temperature (K)	3000K
Opening angle degrees	136
Light orientation	Indirect lighting
Photobiological risk	1
CRI	>80
Control System	On/off
Supply current	350 mA
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Rust brown
Diffuser finish	Opal

Installation instructions

Energy label

Photometric

