LINSE TRACK 20W white 15º 2700K THRIVE ON/OFF

Ref. 03912T2711

IP20





Mounting	Three-phase track
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	20
Energy class light source	F
Light source	COB LED
Lifespan	50.000h L90 B10
Power factor	0.9
Luminous Flux (lm)	1154
Color temperature (K)	2700K
Opening angle degrees	15
Light orientation	Direct
Tilt angles	90
Rotation angles 2	355
Photobiological risk	0
CRI	97
Suitable for seaside areas	No
Control System	On/off
Supply current	450 mA
Structure material	Aluminium
Diffuser material	PC
Structure finish	Black+Black
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric



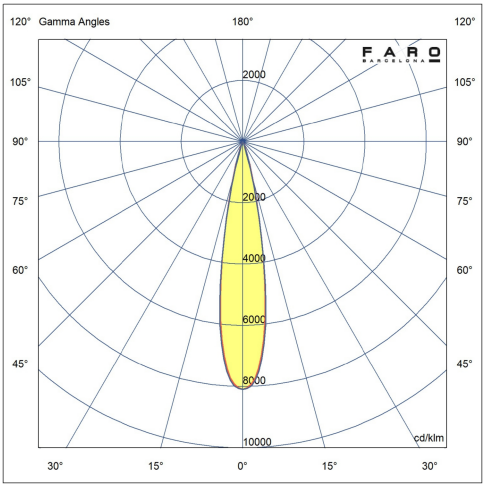

LINSE TRACK 20W black 15º 2700K THRIVE ON/OFF

Ref. 03912T2712

IP20





Mounting	Three-phase track
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	20
Energy class light source	F
Light source	COB LED
Lifespan	50.000h L90 B10
Power factor	0.9
Luminous Flux (lm)	1154
Color temperature (K)	2700K
Opening angle degrees	15
Light orientation	Direct
Tilt angles	90
Rotation angles 2	355
Photobiological risk	0
CRI	97
Suitable for seaside areas	No
Control System	On/off
Supply current	450 mA
Structure material	Aluminium
Diffuser material	PC
Structure finish	Black+Black
Diffuser finish	Transparent

Installation instructions

Energy label

Photometric



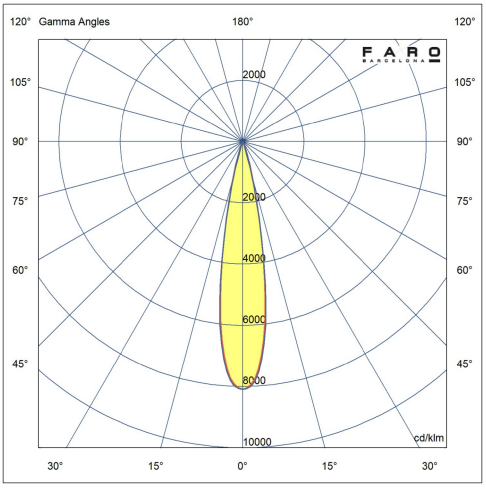

FARO
BARCELONA

LINSE TRACK 20W black 15º 2700K THRIVE ON/OFF

Ref. 03912T2712

