
STICKER Dark grey bollard lamp
Ref. 75541 |LUCID PRODUCT DESIGN

IK10 IP55






Mounting	Floor
Voltage (V)	100V-240V
Hertz	50/60Hz
Class	I
IP	55
IK	10
Power (W)	10
Energy class light source	E
Light source	SMD LED
Power factor	0.82
Luminous Flux (lm)	889
Color temperature (K)	3000K
Opening angle degrees	165 X 2
Light orientation	Direct
Photobiological risk	0
CRI	>80
Control System	On/off
Supply current	350 mA
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Dark Grey
Diffuser finish	Opal

Installation instructions

Energy label

Photometric

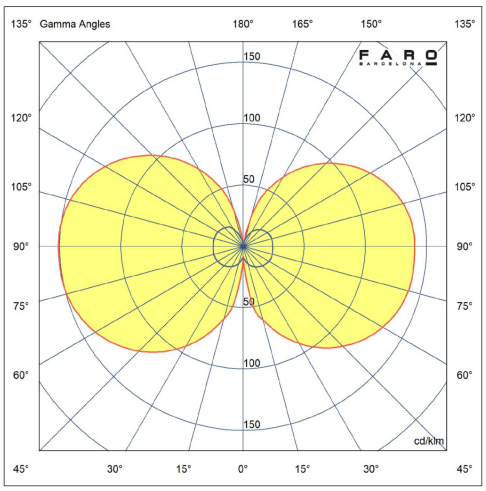

STICKER Dark grey bollard lamp
Ref. 75541 |LUCID PRODUCT DESIGN

