


lei parete up datasheet

LED wall mounted luminaire with conical head. Version with surface mount transformer for fitting onto solid ceiling/wall with cable outlet, power supply with internal power source (converter). Freely moveable through Occhio 3d-kinematics with two axes of rotation at an angle of 22.5° to each other, use via thermally insulated lampshade. Removable head for maintenance purposes, replaceable LED chip. Lighting effect can be changed via adjustable iris aperture, lampshade white matt, translucent. Power 9 W switchable and dimmable via sensor button on the back of the head. Power supply via AC adapter (converter), cable rolled up in the base (can be deactivated). The finishes of the aperture, cover, arm and base are freely configurable.

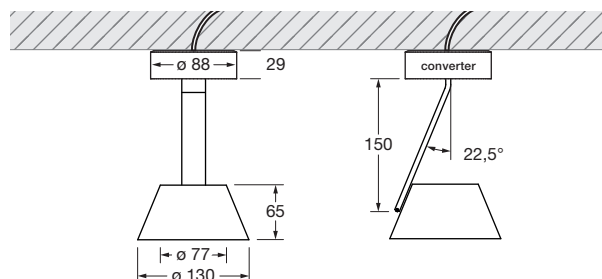


dimensions in mm

technical data lei parete up

| | | |
|-------------|---|---|
| properties | material | aluminium, steel chrome-plated, painted or anodised, plastic, glass, stainless steel, optical plastic |
| | turning range body | 360° (with stop) |
| | turning range head | 360° |
| | weight | 0.8 kg |
| surface | shade | matt white (translucent) |
| | aperture, cover | matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom |
| | body | shiny chrome, matt chrome, matt white, matt black |
| | base | shiny chrome, matt chrome, glossy white, matt white, matt black |
| Occhio LED | average life time | > 50.000 hrs |
| | energy efficiency class (luminous efficiency) | G (65 lm / W) |
| | power | LED 9 W (incl. Occhio power supply unit approx. 11 W, standby < 0.5 W) |
| | color rendering index | perfect color; CRI Ra 97 |
| | color temperature (color consistency) | 2700, 3000 K (2-step) |
| electricity | dimming | via sensor button on the back of the head or external with trailing edge phase-cut dimmer* |
| | power supply unit | integrated operating voltage 230 V AC / 50 Hz |
| | power factor power supply (cos φ1) | 0.9 |
| | flicker / stroboscopic effect | 1 (PstLM) / 0.9 (SVM) |
| | permitted operating conditions | max. 30°C for indoor use only |

* For a list of compatible dimmers, see www.occhio.com/dim_en

lei parete up
lighting effects

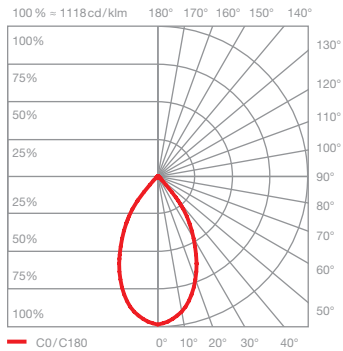

lei
directed light
beam angle approx. 60°

| | | | |
|----------------|---------------|-----|--------|
| insert: | iris | | |
| luminous flux: | perfect color | 9 W | 610 lm |
| | high flux | 9 W | 840 lm |