

Pendant Luminaires | 220-240 V | 2 topLED 48 W DC - 54 W AC | CRI 90 | Base 8169M

Double emission pendant luminaires for indoor application. The super warm white LED light source with a diffused light distribution is composed of 360 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 5357 lm, with a 111.6 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a white finish, processed by means of coating; the diffuser is made of pmma with a laser engravings treatment; the mounting frame is made of metal, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 4.520 kg.

The total absorbed power is 54 W The power supply cable is included and features a 5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 2 light sources of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	82 %
Source lumens	5357 lm
Delivered lumens	4427 lm
Consumption	54 W
Luminaire efficacy	81 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio


L80 B20 C0 80000h

UGR


UGR axial	15
UGR transversal	17.9
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	138°
C0/C180 optics	180°
Light distribution symmetry	Symmetrical 2 assis

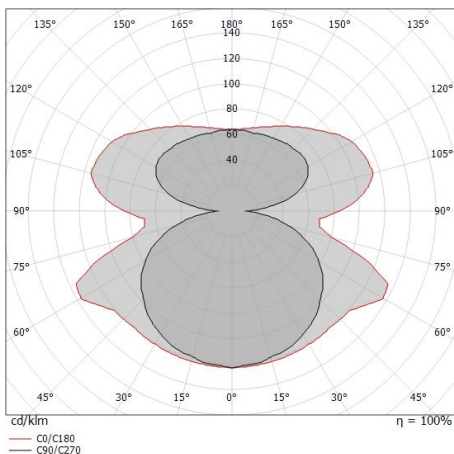

Diphy_ICON | Pendant Luminaires | Accessories
8169M



Dimmer - 0-10V, 1-10V or DALI dimming interface
Bluetooth, 220-240V

Code
KIT0079