

Wall Lights | 220-240 V | 1 topLED 14 W DC - 17 W AC | CRI 90 | Base 8186

Double emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 35 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 1674 lm, with a 119.6 lm/W nominal luminous efficacy.

The device body is made of pu and features a black/white finish; the diffuser is made of pmma with a laser engravings treatment. The ingress protection degree is IP40; the total weight is of 1.326 kg.

The total absorbed power is 17 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class


This product contains a light source of energy efficiency class F.

Illuminotechnical Features


Light Output Ratio (LOR)	47 %
Source lumens	1674 lm
Delivered lumens	789 lm
Consumption	17 W
Luminaire efficacy	46 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio

L80 B20 C0 80000h

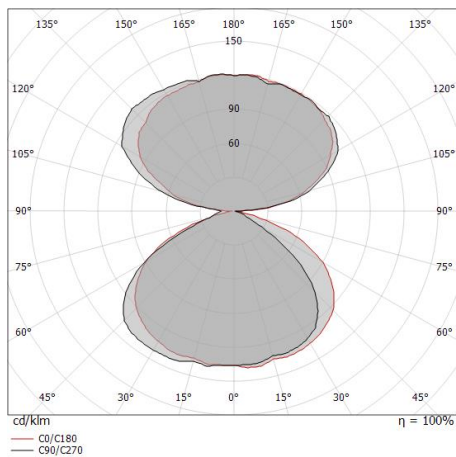

Oxygen_W1 | Wall Lights | Accessories
8186



Dimmer - 0-10V, 1-10V or DALI dimming interface
Bluetooth, 220-240V

Code
KIT0079