

Pendant Luminaires | 220-240 V | 6 topLED 85 W DC - 90 W AC | CRI 90 | Base 8524

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 165 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 8741 lm, with a 102.8 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a white finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of metal, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 7.8 kg.

The total absorbed power is 90 W The power supply cable is included and features a 5 m length.

The device features protection class I and can be ceiling-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class	
This product contains 6 light sources of energy efficiency class F.	


Illuminotechnical Features	
Light Output Ratio (LOR)	82 %
Source lumens	8741 lm
Delivered lumens	7203 lm
Consumption	90 W
Luminaire efficacy	80 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio	
L70 B20 C0 72500h	

OPTICAL	
C90/C270 optics	136°
C0/C180 optics	129°
Light distribution simmetry	Symmetrical 2 assis

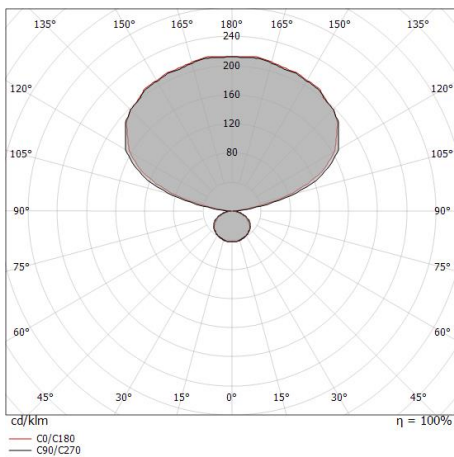

Quad_P12 | Pendant Luminaires | Accessories
8524



Dimmer - 0-10V, 1-10V or DALI dimming interface
Bluetooth, 220-240V

Code
KIT0079