
Bols

ceiling light



Table of contents

1. Product overview	Page 2
2. Finishes and materials	Page 2
3. Light Source & dimming	Page 2
4. Ordering codes	Page 3
5. Certifications & standards	Page 4
6. Maintenance & Cleaning	Page 4

Versions




4022X
Page 3

Bols

ceiling light

1. Product overview

Outdoor aluminium ceiling light with polyethylene shade and integrated dimmable LED. Double layer coating for high resistance to corrosion and other maritime environmental conditions.

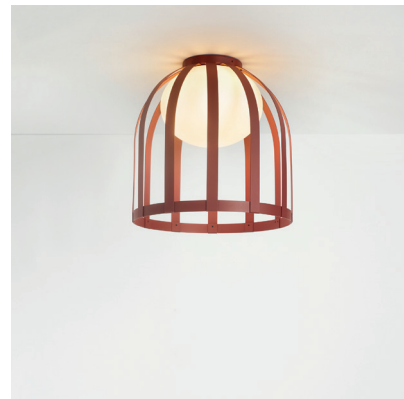

2. Finishes and Materials



Shade: Polyethylene

Body: 78 Oxide Red

3. Light Source & Dimming

Lamping

LED 10W (2700K / Ang. 120° / >90 CRI)

230V / Typ* 870 lumens

*Integrated LED module (included).

Dimming options:

Standard: TRIAC

Optional: DALI, CASAMBI

Bols

ceiling light

4. Ordering Codes

Lamping
LED 10W (2700K / Ang. 120° / >90 CRI)
230V / Typ* 870 lumens
*Integrated LED module (included).

DIM: TRIAC (Optional DALI, CASAMBI)

Finishes
78 Oxide Red



Drawing	Mounting	Setting	Finish Body	Ordering Code
<p>BOL_4022X IP 65</p>	<p>Ceiling light. Surface mounted.</p>	<p>Outdoor</p>	<p>Oxide Red</p>	<p>BOL_4022X_78W</p>

Bols

ceiling light

5. Certifications & Standards



Warranty: 2 years

100% made in Spain

6. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.