


Ceiling Downlights | 220-240 V | 3 topLED 33 W DC - 33 W AC | CRI 90

8893M

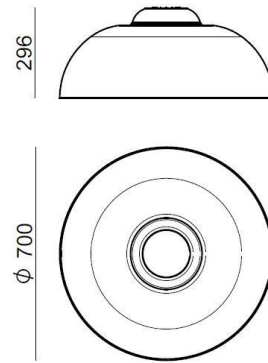

Technical data	
Designer	Mirco Crosatto
Construction year	2019
Type	Ceiling Downlights
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward
Nominal power	33 W DC
Total Power	33 W
Source lumens	3485 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP40
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Net weight	4.2 Kg
Electrostatic discharge protection	No
Surge protection	No
Optics technology	Optilight TM

Finishing casing	
Material	metal
Colour	White
Processing	Coating

Finishing diffuser	
Colour	transparent
Processing	Laser engravings

Ceiling Downlights | 220-240 V | 3 topLED 33 W DC - 33 W AC | CRI 90 | Base **8893M**

Double emission ceiling downlights for indoor application. The super warm white LED light source with a diffused light distribution is composed of 126 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3485 lm, with a 105.6 lm/W nominal luminous efficacy.

The device body is made of metal and features a white finish, processed by means of coating; the diffuser is made with a laser engravings treatment. The ingress protection degree is IP40; the total weight is of 4.2 kg.

The total absorbed power is 33 W

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 3 light sources of energy efficiency class E.

Illuminotechnical Features

Light Output Ratio (LOR)	48 %
Source lumens	3485 lm
Delivered lumens	1688 lm
Consumption	33 W
Luminaire efficacy	51 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio



L70 B20 C0 72500h (at Tj 115 Ta 25)

UGR


UGR axial	16.7
UGR transversal	16.9
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C90/C270 optics	50°
C0/C180 optics	57°
Light distribution symmetry	Symmetrical 2 assis

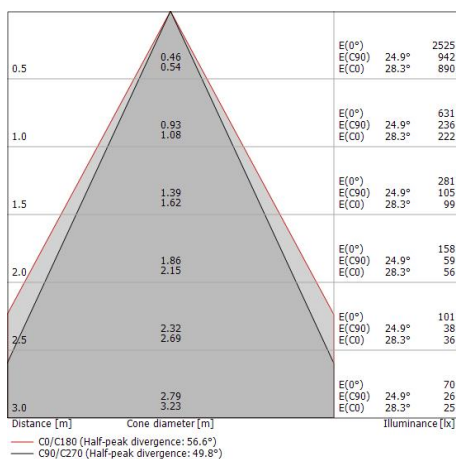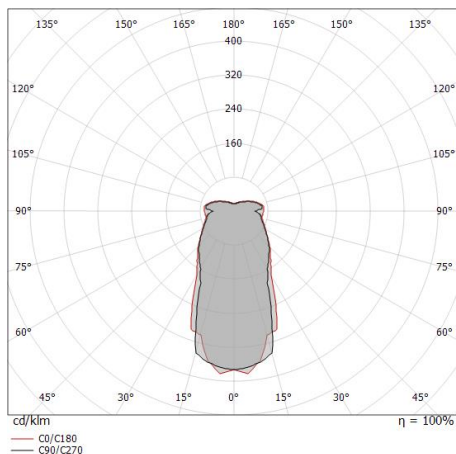

Demì | Ceiling Downlights | Accessories
8893M



Dimmer - Phase cut (Max 100W) - Essential for dimming the lamp
 220-240V

Code
KIT0026



Dimmer - Phase cut CASAMBI - Essential for dimming the lamp with Casambi
 Radio-frequenza, 85-240V

Code
KIT0080