


Pendant Luminaires | 220-240 V  
9 topLED 46 W DC - 49 W AC | CRI 90

8684

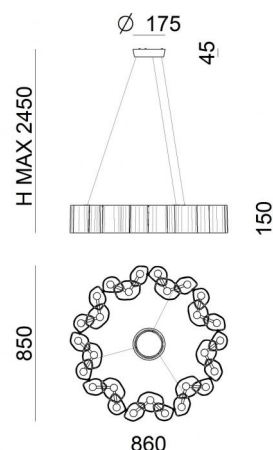

| Technical data                                 |                     |
|------------------------------------------------|---------------------|
| Construction year                              | 2019                |
| Type                                           | Pendant Luminaires  |
| Installation position                          | Ceiling             |
| Installation environment                       | Indoor              |
| Light Source                                   | LED                 |
| Circuit structure                              | topLED              |
| Optics                                         | Diffused            |
| Light emission direction                       | downward and upward |
| Nominal power                                  | 46 W DC             |
| Total Power                                    | 49 W                |
| Source lumens                                  | 5170 lm             |
| Nominal input voltage                          | 220 - 240 V AC      |
| Input voltage range                            | 220 - 240 V AC      |
| Frequency                                      | 60 - 50 Hz          |
| CCT / Tone                                     | 2700 K              |
| Colour rendering index                         | 90 Ra               |
| C.C. / C.V.                                    | AC                  |
| Safety class                                   | 1                   |
| IP                                             | IP20                |
| Glow wire test                                 | 850°                |
| Direct mounting on normally flammable surfaces | Yes                 |
| CE                                             | Yes                 |
| Driver included                                | Driver              |
| Dimmable article                               | Phase cut           |
| Directional                                    | No                  |
| Tilting                                        | No                  |
| Walk-over                                      | No                  |
| Drive-over                                     | No                  |
| Cable included                                 | Yes                 |
| Cable length                                   | 2300 m              |
| Resin potting                                  | No                  |
| Type of light emission                         | Double emission     |
| Net weight                                     | 6.395 Kg            |
| Electrostatic discharge protection             | No                  |
| Surge protection                               | No                  |

#### Finishing casing

|            |                    |
|------------|--------------------|
| Material   | Die-cast Aluminium |
| Colour     | White              |
| Processing | Powder coating     |

#### Finishing diffuser

|          |            |
|----------|------------|
| Material | PC         |
| Colour   | Opal white |

Pendant Luminaires | 220-240 V | 9 topLED 46 W DC - 49 W AC | CRI 90 | Base 8684

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 270 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 5170 lm, with a 112.4 lm/W nominal luminous efficacy.


The device body is made of die-cast aluminium and features a white finish, processed by means of powder coating; the diffuser is made of PC. The ingress protection degree is IP20; the total weight is of 6.395 kg.

The total absorbed power is 49 W The power supply cable is included and features a 2300 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

| Energy efficiency class                                             |                |
|---------------------------------------------------------------------|----------------|
| This product contains 9 light sources of energy efficiency class F. |                |
| Illuminotechnical Features                                          |                |
| Light Output Ratio (LOR)                                            | 71 %           |
| Source lumens                                                       | 5170 lm        |
| Delivered lumens                                                    | 3687 lm        |
| Consumption                                                         | 49 W           |
| Luminaire efficacy                                                  | 75 lm/W        |
| Colour temperature                                                  | 2700 K         |
| Standard Deviation of Colour Matching                               | 3 Step MacAdam |
| Colour rendering index                                              | 90 Ra          |
| Junction temperature (lighting fixture)                             | 80             |
| Standard Operating Ambient Temperature                              | 25°C           |
| LED Life / Failure Ratio                                            |                |
| L70 B20 C0 72500h                                                   |                |

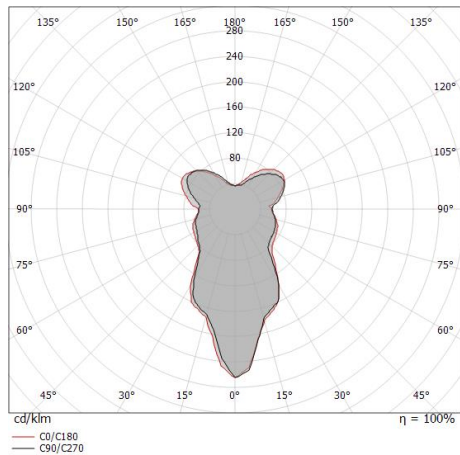


Honey | Pendant Luminaires | Accessories  
8684



Dimmer - Phase cut (Max 100W) - Essential for dimming the lamp  
220-240V

Code  
KIT0026



Dimmer - Phase cut CASAMBI - Essential for dimming the lamp with Casambi  
Radio-frequenza, 85-240V

Code  
KIT0080