



Pendant Luminaires | 220-240 V | 12 topLED 95 W DC - 105 W AC | CRI 90 | Base  
**8686**

Double emission pendant luminaires for indoor application. The warm white LED light source with a diffused light distribution is composed of 360 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 9500 lm, with a 100.0 lm/W nominal luminous efficacy.

The device body is made of die-cast aluminium and features a white finish, processed by means of powder coating; the diffuser is made of PC. The ingress protection degree is IP20;

The total absorbed power is 105 W The power supply cable is included and features a 6000 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

**Energy efficiency class**


This product contains 12 light sources of energy efficiency class F.

**Illuminotechnical Features**



Light Output Ratio (LOR)	78 %
Source lumens	9500 lm
Delivered lumens	7415 lm
Consumption	105 W
Luminaire efficacy	70 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

**LED Life / Failure Ratio**

L70 B20 C0 72500h

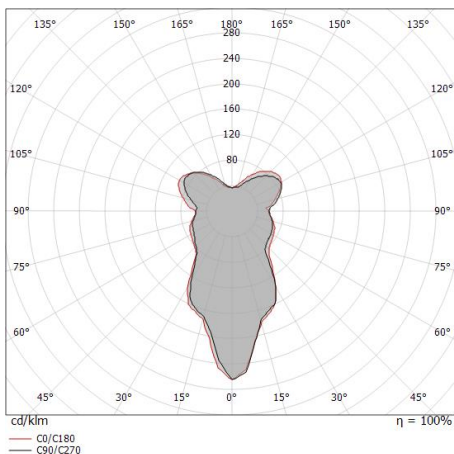

Honey | Pendant Luminaires | Accessories  
**8686**



Dimmer - 0-10V, 1-10V or DALI dimming interface  
Bluetooth, 220-240V

**Code**  
KIT0079