
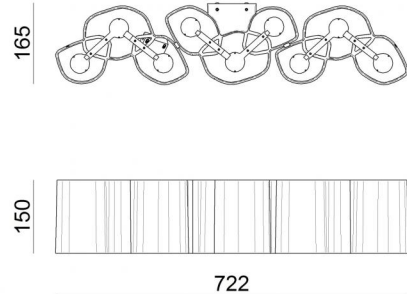


Wall Lights | 220-240 V
3 topLED 19 W DC - 20 W AC | CRI 90
8690



Technical data	
Construction year	2019
Type	Wall Lights
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward and upward
Nominal power	19 W DC
Total Power	20 W
Source lumens	2076 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
Frequency	60 - 50 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Net weight	2.195 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	metal
Colour	White
Processing	Coating

Finishing diffuser	
Material	PC
Colour	Opal white

Wall Lights | 220-240 V | 3 topLED 19 W DC - 20 W AC | CRI 90 | Base 8690

Double emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 72 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 2076 lm, with a 109.3 lm/W nominal luminous efficacy.

The device body is made of metal and features a white finish, processed by means of coating; the diffuser is made of PC. The ingress protection degree is IP20; the total weight is of 2.195 kg.

The total absorbed power is 20 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class


This product contains 3 light sources of energy efficiency class F.

Illuminotechnical Features


Light Output Ratio (LOR)	65 %
Source lumens	2076 lm
Delivered lumens	1356 lm
Consumption	20 W
Luminaire efficacy	67 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio

L70 B20 C0 72500h

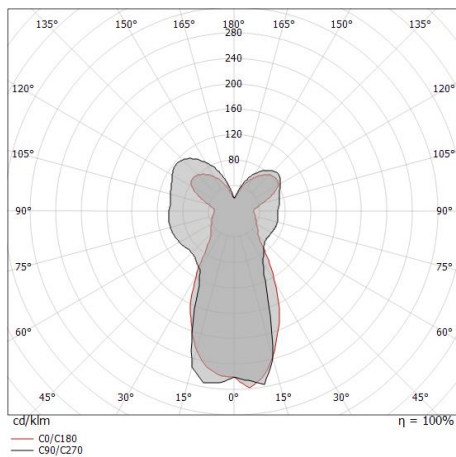

Honey | Wall Lights | Accessories
8690



Dimmer - Phase cut (Max 100W) - Essential for dimming the lamp
 220-240V

Code
KIT0026



Dimmer - Phase cut CASAMBI - Essential for dimming the lamp with Casambi
 Radio-frequenza, 85-240V

Code
KIT0080