


Wall Lights | 220-240 V
60 topLED 24 W DC - 28 W AC | CRI 90
9783

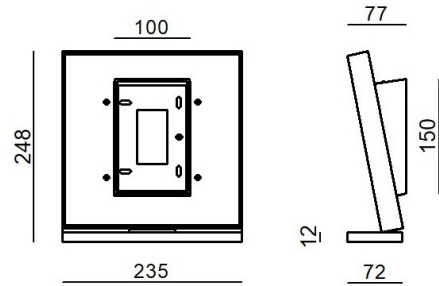

Technical data	
Type	Wall Lights
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	upward
Nominal power	24 W DC
Total Power	28 W
Source lumens	3735 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	Phase cut
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	1.950 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Aluminium
Colour	Black
Processing	Coating

Finishing diffuser

Material	PC
Colour	transparent

Finishing mounting frame

Material	Aluminium
Colour	White
Processing	Coating

Wall Lights | 220-240 V | 60 topLED 24 W DC - 28 W AC | CRI 90 | Base 9783

Single emission wall lights for indoor application. The warm white LED light source with a diffused light distribution is composed of 60 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3735 lm, with a 155.6 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a black finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of aluminium, with a white finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 1.950 kg.

The total absorbed power is 28 W

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	75 %
Source lumens	3735 lm
Delivered lumens	2806 lm
Consumption	28 W
Luminaire efficacy	100 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C
LED Life / Failure Ratio	
L70 B20 C0 72500h (at Tj 115 Ta 25)	

