


Floor Lamp | 100-240 V  
1 topLED 25 W DC - 27 W AC | CRI 90

**9707**

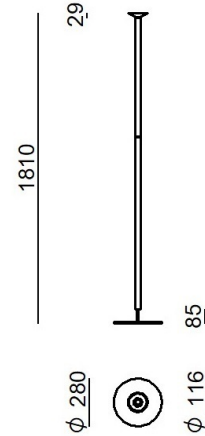

Technical data	
Type	Floor Lamp
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	upward
Nominal power	25 W DC
Total Power	27 W
Source lumens	3015 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	100 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	Touch
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Electric socket	Type C
Cable length	2,5 m
Resin potting	No
Type of light emission	Single emission
Net weight	7.300 Kg
Electrostatic discharge protection	No
Surge protection	No

**Finishing casing**

Material	Aluminium
Colour	White
Processing	Coating

**Finishing diffuser**

Material	Glass
Colour	transparent
Processing	Sandblasting

**Finishing base**

Material	Iron
Colour	White
Processing	Coating

Floor Lamp | 100-240 V | 1 topLED 25 W DC - 27 W AC | CRI 90 | Base 9707

Single emission floor lamp for indoor application. The warm white LED light source with a diffused light distribution is composed of 1 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 3015 lm, with a 120.6 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a white finish, processed by means of coating; the diffuser is made of glass with a sandblasting treatment. The ingress protection degree is IP20; the total weight is of 7.300 kg.

The total absorbed power is 27 W The power supply cable is included and features a 2,5 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

**Energy efficiency class**

This product contains a light source of energy efficiency class F.

**Illuminotechnical Features**

Light Output Ratio (LOR)	67 %
Source lumens	3015 lm
Delivered lumens	2041 lm
Consumption	27 W
Luminaire efficacy	75 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

**LED Life / Failure Ratio**

L80 B20 C0 61000h (at Tj 105 Ta 25 )

**OPTICAL**

C0/C180 optics	100°
Light distribution symmetry	Symmetrical

