


Table Lamps | 220-240 V | 1x7W E27

**9064**

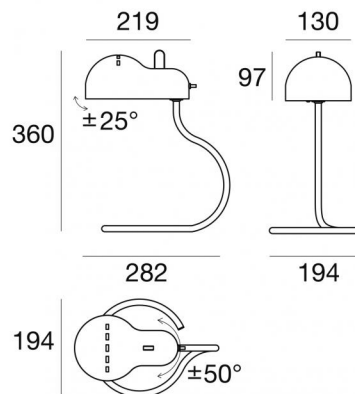

Technical data	
Type	Table Lamps
Installation position	Floor
Installation environment	Indoor
Bulb included	Yes
Lamp cap	1 x E27
Light emission direction	downward
Frequency	50-60 Hz
Optics	Diffused
Safety class	2
IP	IP20
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Dimmable article	No
Directional	No
Tilting	Yes
total angle (horizontal plane)	100 °
total angle (vertical plane)	50 °
Walk-over	No
Drive-over	No
Cable included	Yes
Electric socket	Type C
Cable length	1.5 m
Resin potting	No
Net weight	0.935 Kg

**Finishing diffuser**

Material	metal - metal
Colour	Red RAL 3020 - White RAL 9016
Processing	Coating - Coating

**Finishing base**

Material	metal
Colour	Red RAL 3020
Processing	Coating

Table Lamps | 220-240 V | 1x7W E27 | Base 9064

Single emission table lamps for indoor application. LED lamplamp included, lamp cap E27 1x7W.

The diffuser is made of metal with a coating treatment the diffuser is made of metal with a coating treatment. The ingress protection degree is IP20; the total weight is of 0.935 kg.

The power supply cable is included and features a 1.5 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

**Energy efficiency class**

This product contains a light source of energy efficiency class E.

**Illuminotechnical Features**


Light Output Ratio (LOR)	60 %
Source lumens	806 lm
Delivered lumens	485 lm
Consumption	7 W
Luminaire efficacy	115 lm/W
Colour temperature	2700 K
Colour rendering index	80 Ra
Source lumens	1 x 806 lm

**UGR**

UGR axial	24
UGR transversal	23.5
X=4H   Y=8H	S=0.25H
Reflection factor	70/50/20

**OPTICAL**

C0/C180 optics	125°
Light distribution simmetry	Symmetrical

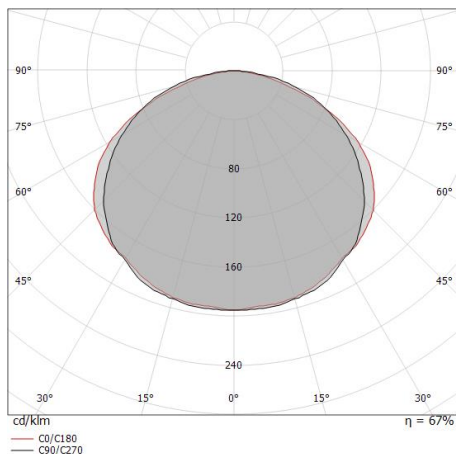

Distance [m]	Cone diameter [m]	Illuminance [lx]	E(0°)	E(C90)	E(C0)
0.5	1.91 2.07	630 31 26	62.4°	64.2°	64.2°
1.0	3.83 4.14	158 8 7	62.4°	64.2°	64.2°
1.5	5.74 6.21	70 3 3	62.4°	64.2°	64.2°
2.0	7.65 8.27	39 2 2	62.4°	64.2°	64.2°
2.5	9.56 10.34	25 1 1	62.4°	64.2°	64.2°
3.0	11.48 12.41	18 1 1	62.4°	64.2°	64.2°

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0/C180 (Half-peak divergence: 128.4°)  
— C90/C270 (Half-peak divergence: 124.8°)