


Table Lamps | 220-240 V | 1x7W E27

9065

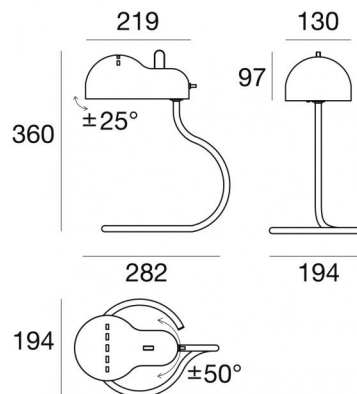

| Technical data | |
|--|-------------|
| Designer | Joe Colombo |
| Construction year | 1970 |
| Type | Table Lamps |
| Installation position | Floor |
| Installation environment | Indoor |
| Bulb included | Yes |
| Lamp cap | 1 x E27 |
| Light emission direction | downward |
| Frequency | 50-60 Hz |
| Optics | Diffused |
| Safety class | 2 |
| IP | IP20 |
| Glow wire test | 650° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Dimmable article | No |
| Directional | No |
| Tilting | Yes |
| total angle (horizontal plane) | 100 ° |
| total angle (vertical plane) | 50 ° |
| Walk-over | No |
| Drive-over | No |
| Cable included | Yes |
| Electric socket | Type C |
| Cable length | 1.5 m |
| Resin potting | No |
| Net weight | 0.935 Kg |

Finishing diffuser

| | |
|------------|----------------|
| Material | metal |
| Colour | White RAL 9016 |
| Processing | Coating |

Finishing base

| | |
|------------|----------------|
| Material | metal |
| Colour | chrome |
| Processing | Electroplating |

Table Lamps | 220-240 V | 1x7W E27 | Base 9065

Single emission table lamps for indoor application. LED lamplamp included, lamp cap E27 1x7W.

The diffuser is made of metal with a coating treatment. The ingress protection degree is IP20; the total weight is of 0.935 kg.

The power supply cable is included and features a 1.5 m length.

The device features protection class II and can be floor-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.

| Energy efficiency class | |
|--|--|
| This product contains a light source of energy efficiency class E. | |

| Illuminotechnical Features | |
|----------------------------|------------|
| Light Output Ratio (LOR) | 60 % |
| Source lumens | 806 lm |
| Delivered lumens | 485 lm |
| Consumption | 7 W |
| Luminaire efficacy | 115 lm/W |
| Colour temperature | 2700 K |
| Colour rendering index | 80 Ra |
| Source lumens | 1 x 806 lm |

| UGR | |
|-------------------|----------|
| UGR axial | 24 |
| UGR transversal | 23.5 |
| X=4H Y=8H | S=0.25H |
| Reflection factor | 70/50/20 |

| OPTICAL | |
|-----------------------------|-------------|
| C0/C180 optics | 125° |
| Light distribution simmetry | Symmetrical |

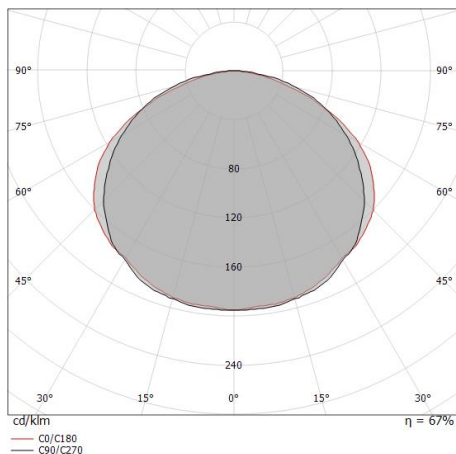

| Distance [m] | Cone diameter [m] | Illuminance [lx] | E(0°) | E(C90) | E(C0) |
|--------------|-------------------|------------------|-------|--------|-------|
| 0.5 | 1.91 2.07 | 630 31 26 | 62.4° | 64.2° | 64.2° |
| 1.0 | 3.83 4.14 | 158 8 7 | 62.4° | 64.2° | 64.2° |
| 1.5 | 5.74 6.21 | 70 3 3 | 62.4° | 64.2° | 64.2° |
| 2.0 | 7.65 8.27 | 39 2 2 | 62.4° | 64.2° | 64.2° |
| 2.5 | 9.56 10.34 | 25 1 1 | 62.4° | 64.2° | 64.2° |
| 3.0 | 11.48 12.41 | 18 1 1 | 62.4° | 64.2° | 64.2° |

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 128.4°)
— C90/C270 (Half-peak divergence: 124.8°)