

## Set Focus Trace Duo

Set Focus Trace ist der leistungsstarke Strahler mit einstellbarem Abstrahlwinkel. Das hell-warme und entblendete Licht lässt sich durch Drehen und Schwenken punktgenau positionieren.

Der Strahler ist aus hochwertigem Aluminium gefertigt und setzt präzise Akzente auf Bilder, Oberflächen und Objekte.

Set Focus Trace bietet eine Reihe von cleveren Funktionen:

- Dreh- und schwenkbarer Kopf
- Einstellbarer Abstrahlwinkel
- GRAU App

Designed und gefertigt am GRAU Campus in Deutschland.

---

## Farben

Farben

● White

● Black

Artikelnummer

CPO12-3

CPO12-1

---

## Dimensionen

Fixture  
H 4,7 cm × W 70 cm × D 6 cm



Head  
Ø 9 cm × H 10 cm

## Body

Maße Verpackung (L x B x H)	70cm x 30cm x 10cm
Material	Aluminium
Oberfläche	Pulverbeschichtet
Gewicht	2,5kg
Gewicht inkl. Verpackung	3kg
Leuchtenkopf beweglich	Ja
Montageart	Deckenaufbau
Nennspannung	220–240V
Leistungsaufnahme	2x16W
Leuchteneffizienz	78lm/W
Anschlussleitung (Ader-Zahl)	3
Schutzklasse	I
Artikelnummer	CPO12-1

---

## Licht

Leuchtmittel	LED
Leuchtenlichtstrom	2x 1250lm
Farbwiedergabeindex	CRI >90
Lichtaustritt	Direkt
Abstrahlwinkel	15–80°
Lichtverteilung	Symmetrisch
Farbtemperatur	2700K
Lichtfarbe	Warmweiß
Dimmbar	Ja
Art der Dimmung	Phasenabschnitt
GRAU App Upgrades möglich	Ja
Umbau auf DALI möglich	Ja

## Set Focus Trace Duo

Set Focus Trace is the powerful spotlight with adjustable beam angle. The bright, warm and glare-free light can be positioned precisely by turning.



The spotlight is made of high-quality aluminum and sets precise accents on pictures, surfaces and objects.

Set Focus Trace offers a range of clever functions:


- Rotating head
- Adjustable beam angle
- GRAU App

Designed and manufactured at the GRAU Campus in Germany.

### Colors

Colors	SKU
 White	CPO12-3
 Black	CPO12-1

### Dimensions

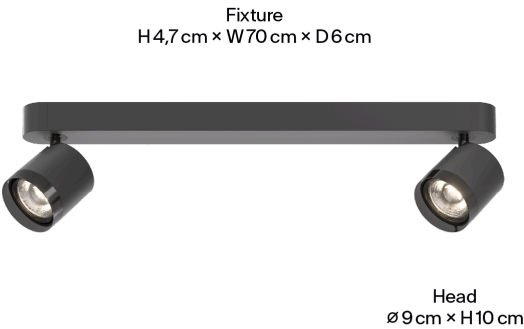

## Body

Packaging dimensions (L x W x H)	70cm x 30cm x 10cm
Material	Aluminum
Surface	Powder-coated
Weight	2,5kg
Weight incl. packaging	3kg
Movable lamp head	Yes
Mounting type	Ceiling-mounted (surface)
Rated voltage	220–240V
Power consumption	2x16W
Luminaire efficiency	78lm/W
Connection cable (number of cores)	3
Protection class	I
SKU	CPO12-1

---

## Light

Light source	LED
Luminous flux	2x 1250lm
Color rendering index	CRI >90
Light emission	Direct
Beam angle	15–80°
Light distribution	Symmetric
Color temperature	2700K
Light color	Warm White
Dimmable	Yes
Type of dimming	Trailing edge
GRAU App upgrades possible	Yes
Conversion to DALI possible	Yes