


PRODUCT INFORMATION SHEET

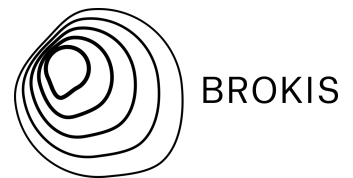

Name PURO CONTOUR TRIANGLE 600

Type pendent lamp

ID PC1133



Description Puro is a boldly minimalistic variation on atmospheric pendant lights. Inspiration for the collection and its name come from the Spanish word for "cigar", which also means "pure" and is a reference to the composition's clean lines. The diffused glow of the tubes to elicit a dynamic ambience, while the alternating gloss and matte finishes provide a degree of provocation. Puro offers atmospheric room lighting as well as lighting for offices, hospitality interiors, boutiques, showrooms and private dining areas

Technical description The craftsmanship applied in production follows in the centuries-old tradition and experience of master glassmakers. The precision crafting of hand-blown glass instills distinctive, enduring character and outstanding quality in all Brokis products. The glass shades are formed from multiple layers of molten glass, each of which is scrutinized by the master glassmaker prior to being blown into the mold. Up to 70% of the resulting quality is achieved in this stage of production.

Glass Colour

triplex opal	A	CGC39
dark grey - opaline	B	CGC1507

Glass surface

acid-etched both side surface	A	CGSU881
-------------------------------	---	---------

Body finish

metal - black matte powder coating	A	CCS846
metal - white matte powder coating	A	CCS845

Canopy finish

metal - black matte powder coating	A	CCSC619
metal - white matte powder coating	A	CCSC618

Connection method

BROKIS connector 24V	A	CCM1019
----------------------	---	---------

Cable colour

textile cable - black	A	CECL519
textile cable - white	A	CECL521

LED Source

600mm 24V, LED, 13W, 2700K, 1105lm, RA90+, DIM	A	LEDS1926
600mm 24V, LED, 13W, 4000K, 1220lm, RA90+, DIM	A	LEDS1927
600mm 24V, LED, 13W, 5000K, 1300lm, RA90+, DIM	A	LEDS1928

Dimmable version

non-dimmable version	A	CEDV1457
DIM RF system - remote control version	A	CEDV1461
DIM PWM signal	A	CEDV1459
DIM 1-10V	A	CEDV1460
DIM DALI version	A	CEDV1458
DIM AC phase-cut, ELV	A	CEDV1730
DIM CASAMBI CBU-PWM4	A	CEDV2854