


## Mito alto side 70 pure datasheet

Linear LED ceiling luminaire with single-sided light output, available in the following lengths: 70.5 cm. This side-light effect illuminates wall surfaces (wall washing) uniformly and without glare.

The luminaire can be recess-mounted in hollow ceilings using the recessed mounting plate supplied. Luminaire incl. integrated power supply unit and connection to 230 V AC. The luminaire can be dimmed using a trailing-edge phase cut dimmer\* or can be controlled using Occhio air or DALI. The color temperature can be preset (2700/3000/3500/4000 K) or is continuously adjustable between 2700–4000 K (optional 2200 to 3500 K) using Occhio air or DALI.

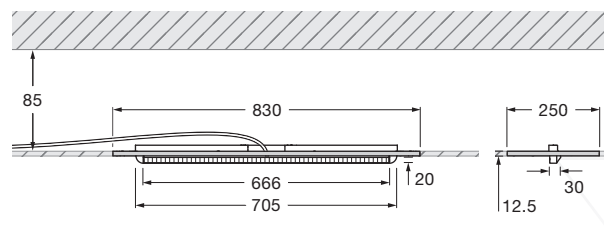

incl. power supply unit



dimensions in mm

### technical data Mito alto side 70 pure

properties	material	head aluminium painted or PVD-coated, optical plastic plasterboard reinforced plasterboard	
	recommended wall clearance for homogeneous wall illumination	approx. 70 cm for 250 cm ceiling height approx. 85 cm for 300 cm ceiling height	
	weight (luminaire + plasterboard)	1.6 kg + 3.5 kg	
surface	head	bronze, matt gold, rose gold, matt silver, matt white, matt black, phantom, black phantom	
Occhio »color tune« LED	average life time	> 50.000 hrs	
	energy efficiency class (luminous efficiency)	G (52 lm / W)	
	power	LED 30 W (incl. Occhio power supply unit approx. 36 W, standby < 0.5 W)	
	color rendering index	high color; CRI Ra 95	
	color temperature (color consistency)	2700–4000 K (2-step)	2200–3500 K (2-step 2200 K, 3-step 3500 K)
electricity	dimming	via trailing-edge phasecut dimmer*, Occhio air or DALI	
	connection	230 V AC / 50 Hz	
	power factor power supply (cos φ1)	0.9	
	flicker / stroboscopic effect	1 (PstLM) / 0.9 (SVM)	
	permitted operating conditions	max. 30°C for indoor use only	

\* For a list of compatible dimmers, see [www.occhio.com/dim\\_en](http://www.occhio.com/dim_en), trailing-edge phasecut dimmer, Occhio air and DALI not combinable

## Mito alto side 70 pure lighting effects

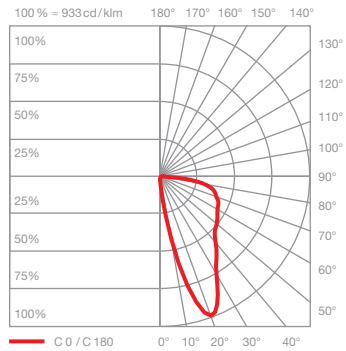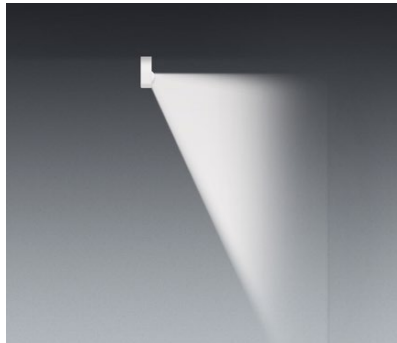

### side

concentrated light, beam angle approx. 50°


inserts: wallwash

luminous flux: high color 30 W 1600 lm

## control options

### Control

#### Mito set box



sospeso / aura /  
sfera / sfera su / volo



soffitto / alto flat /  
aura alta



alto & alto side

#### sospeso / aura / sfera / volo:

COLOR (Sensor off)  
adjustable color temperature (4 stages)  
trailing-edge phase cut dimming possible

PRESET (sospeso / aura / volo)  
adjustable color temperature (4 stages)  
adjustable up / down light intensity (5 stages)

PRESET (sfera)  
color temperature adjustable (4 stages)  
light intensity adjustable (5 stages)

#### SENSOR

»touchless control« (gesture control)  
switching, dimming, up / down fading\*  
»color tune« (color temperature continuously  
adjustable) no external dimming possible

#### soffitto / alto / alto side / aura alta:

COLOR  
adjustable color temperature (4 stages)  
trailing-edge phase cut dimming possible

\*not with sfera

#### Mito »air« box



sospeso / aura /  
sfera / volo



alto & alto side



terra / raggio / largo /  
soffitto / alto flat / aura alta



**Occhio air** (Bluetooth control using Occhio air app) or air controller (optional) control of individual  
luminaires, groups and scenes

#### sospeso / aura / sfera / volo:

SENSOR  
»air« + »touchless control« (Bluetooth-  
and gesture control)  
control via »touchless control« and Occhio air app  
or »air« controller

#### SENSOR OFF

»air«  
control via Occhio air App or »air« controller  
switching, dimming, up / down fading »color tune«  
(color temperature continuously adjustable)

#### terra / largo / raggio:

»air«, »touchless control« (largo / raggio / terra)  
and »body sensor« (raggio / terra) (Bluetooth- and  
gesture control) control via »touchless control«,  
»body sensor« and Occhio air App or »air«  
controller

»ambient light control« (terra)  
adjustment to ambient light

»presence sensor« (terra)  
presence identification and automatically  
shutdown by presence sensor

deactivation and adjustable via control  
and sensor with »air« app

#### alto / alto side / aura alta:

»air« (Bluetooth - control)  
control via Occhio air App or »air« controller  
switching, dimming »color tune« (color tempera-  
ture continuously adjustable), up / down fading  
(aura alta)

with Mito »air« box no external dimming possible

#### Mito DALI box (control via DALI)




sospeso / volo /  
soffitto / alto flat



aura / aura alta



alto & alto side up



alto & alto side track

#### sospeso / aura / aura alta / volo:

– color tune adjustable\*  
– adjust continuously dimming  
– up + downlight separate controllable  
(two DALI addresses needed)  
– no »touchless control«, no fading

#### soffitto / alto / alto side:

– color tune adjustable\*  
– continuously dimming

\* DALI controller DALI Device type 8 (DT8) for controlling of the color tune necessary further signs on [www.occhio.com/dali](http://www.occhio.com/dali)

## Mito alto side 70 pure DALI connection diagram

A maximum of 64 Mito alto units can be assigned to each DALI circuit.

The Mito alto units can be organized into as many as 16 groups and equipped with an additional 16 scenarios (predefined settings).

Using a DALI short address, they can be actuated and configured individually. In addition, the bi-directional data transfer lets users query the state/status of individual luminaires.

You can find more detailed information at [www.occhio.com/dali](http://www.occhio.com/dali).

