


Table Lamps | 220-240 V | 2 topLED 7 W DC - 9 W AC

CRI 90

7113

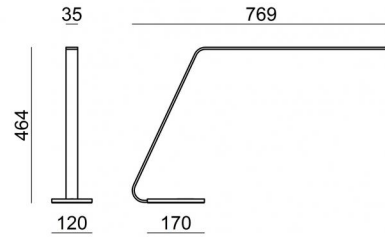

Technical data	
Construction year	2018
Type	Table Lamps
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	Diffused
Light emission direction	downward
Nominal power	7 W DC
Total Power	9 W
Source lumens	791 lm
Nominal input voltage	220 - 240 V AC
Input voltage range	220 - 240 V AC
Frequency	50 - 60 Hz
CCT / Tone	3000 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	2
IP	IP20
Optical compartment IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	Touch
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Electric socket	Type C
Cable length	1.6 m
Resin potting	No
Type of light emission	Single emission
Net weight	2.05 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Aluminium
Colour	Black
Processing	Coating

Finishing diffuser	
Material	PC
Colour	opaline

Table Lamps | 220-240 V | 2 topLED 7 W DC - 9 W AC | CRI 90 | Base 7113

Single emission table lamps for indoor application. The warm white LED light source with a diffused light distribution is composed of 35 topLEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 791 lm, with a 113.0 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a black finish, processed by means of coating; the diffuser is made of PC. The ingress protection degree is IP20; the total weight is of 2.05 kg.

The total absorbed power is 9 W The power supply cable is included and features a 1.6 m length.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 2 light sources of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	47 %
Source lumens	791 lm
Delivered lumens	373 lm
Consumption	9 W
Luminaire efficacy	41 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25°C

LED Life / Failure Ratio


L80 B20 C0 80000h

UGR

UGR axial	13.7
UGR transversal	19.2
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

C0/C180 optics	111°
Light distribution simmetry	Symmetrical

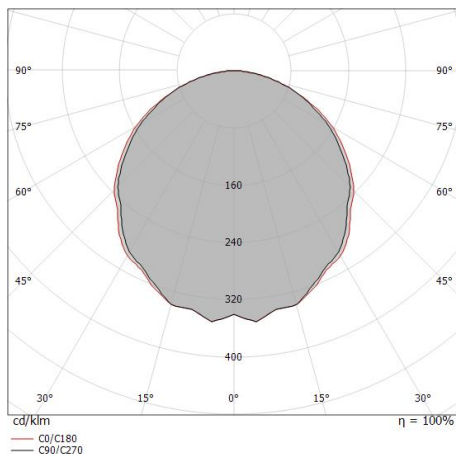

Distance [m]	Cone diameter [m]	Illuminance [lx]	E(0°)	E(C90)	E(C0)
0.5	1.44	508	55.3°	48	43
	1.53	48	56.8°		
1.0	2.89	127	55.3°	12	11
	3.06	12	56.8°		
1.5	4.33	56	55.3°	5	5
	4.58	5	56.8°		
2.0	5.78	32	55.3°	3	3
	6.11	3	56.8°		
2.5	7.22	20	55.3°	2	2
	7.64	2	56.8°		
3.0	8.67	14	55.3°	1	1
	9.17	1	56.8°		

Distance [m] Cone diameter [m] Illuminance [lx]

— C0/C180 (Half-peak divergence: 113.6°)
 - - C90/C270 (Half-peak divergence: 110.6°)